


SINGLE ROW DEEP GROOVE BALL BEARINGS – 6200 Series



for illustration only

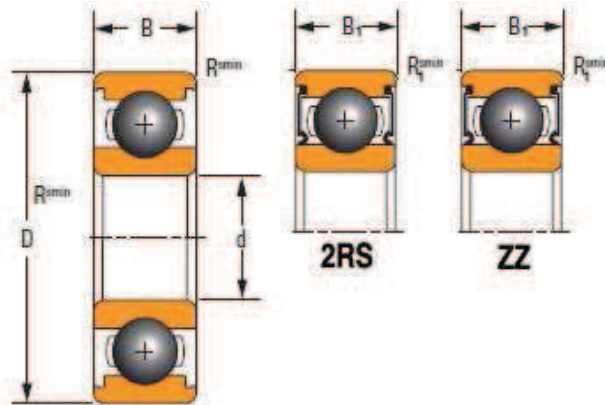


PFRK REFERENCE			BOUNDARY DIMENSION [mm]				BASIC LOAD RATING [N]		SPEED LIMIT [rpm]			MASS open type [Kg]
									Lubrication			
Open	Shielded	Sealded	d	D	B	r _{min}	Dynamic C	Static C ₀	Grease		Oil	
									Open, ZZ	2RS	Open	
6200	6200 ZZ	6200 2RS	10	30	9	0.6	5100	2400	24000	15000	29000	0.032
6201	6201 ZZ	6201 2RS	12	32	10	0.6	6800	3050	22000	17000	28000	0.035
6202	6202 ZZ	6202 2RS	15	35	11	0.6	7650	3750	20000	14000	24000	0.045
6203	6203 ZZ	6203 2RS	17	40	12	0.6	9550	4800	17000	12000	20000	0.064
6204	6204 ZZ	6204 2RS	20	47	14	1.0	12800	6600	15000	11000	18000	0.103
6205	6205 ZZ	6205 2RS	25	52	15	1.0	14000	7850	13000	8400	15000	0.127
6206	6206 ZZ	6206 2RS	30	62	16	1.0	19500	11300	11000	7000	13000	0.202
6207	6207 ZZ	6207 2RS	35	72	17	1.1	25500	15300	9000	6300	11000	0.288
6208	6208 ZZ	6208 2RS	40	80	18	1.1	30700	19000	8500	5600	10000	0.368
6209	6209 ZZ	6209 2RS	45	85	19	1.1	33200	21600	7500	5000	9000	0.416
6210	6210 ZZ	6210 2RS	50	90	20	1.1	35100	23200	7000	4800	8500	0.463
6211	6211 ZZ	6211 2RS	55	100	21	1.5	43600	29000	6300	4300	7500	0.610
6212	6212 ZZ	6212 2RS	60	110	22	1.5	47500	32500	6000	4000	7000	0.780
6213	6213 ZZ	6213 2RS	65	120	23	1.5	55900	40500	5300	3600	6300	0.990
6214	6214 ZZ	6214 2RS	70	125	24	1.5	60500	45000	5000	3400	6000	1.20
6215	6215 ZZ	6215 2RS	75	130	25	1.5	66300	49000	4800	3200	5600	1.30
6216	6216 ZZ	6216 2RS	80	140	26	2.0	70200	55000	4500	3000	5300	1.40
6217	6217 ZZ	6217 2RS	85	150	28	2.0	83200	64000	4300	2800	5000	1.80
6218	6218 ZZ	6218 2RS	90	160	30	2.0	95600	73500	3800	2600	4500	2.15
6219	6219 ZZ	6219 2RS	95	170	32	2.1	108000	81500	3600	2400	4300	2.60
6220	6220 ZZ	6220 2RS	100	180	34	2.1	124000	93000	3400	2400	4000	3.15
6221	6221 ZZ	6221 2RS	105	190	36	2.1	133000	104000	3200	2200	3800	3.70
6222	6222 ZZ	6222 2RS	110	200	38	2.1	143000	118000	3000	2000	3600	4.35
6224	6224 ZZ	6224 2RS	120	215	40	2.1	146000	118000	2800	1900	3400	5.15

SINGLE ROW DEEP GROOVE BALL BEARINGS – 6200 Series



for illustration only

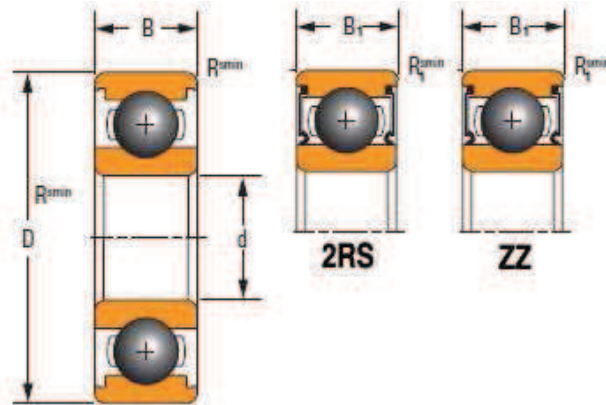

PFRK REFERENCE			BOUNDARY DIMENSION [mm]				BASIC LOAD RATING [N]		SPEED LIMIT [rpm]			MASS open type [Kg]
									Lubrication			
Open	Shielded	Sealded	d	D	B	r _{min}	Dynamic C	Static C ₀	Grease		Oil	
									Open, ZZ	2RS	Open	
6226	6226 ZZ	6226 2RS	130	230	40	3.0	156000	132000	2600	1800	3200	5.80
6228	-	-	140	250	42	3.0	165000	150000	2400	-	3000	7.45
6230	-	-	150	270	45	3.0	174000	166000	2000	-	2600	9.40
6232	-	-	160	290	48	3.0	182000	176000	1800	-	2200	14.0